
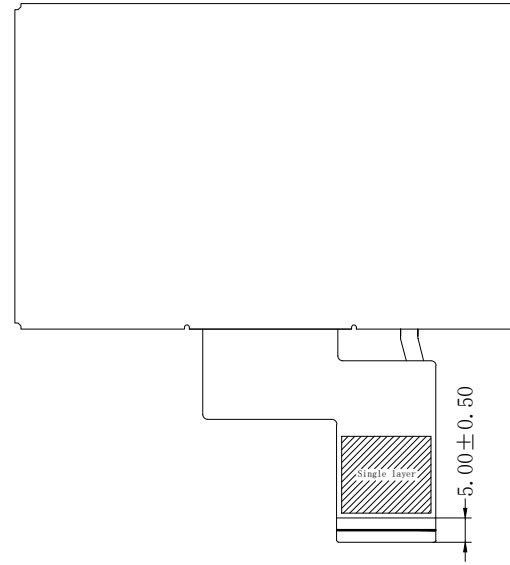
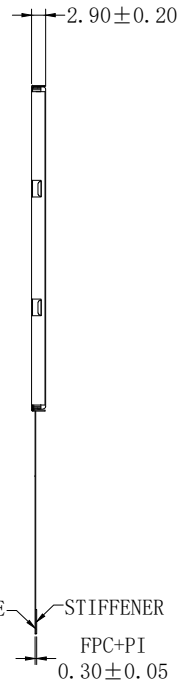


FRONT VIEW

SIDE VIEW

REAR VIEW

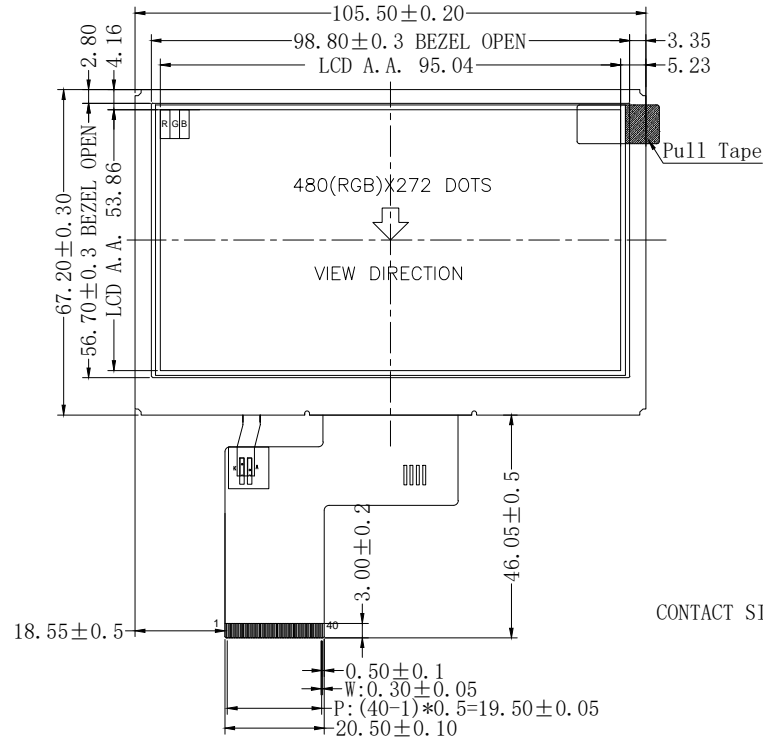


FPC INTERFACE


1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

Display Type	TN/NORMAL WHITE/Transmissive
Display Resolution	480*(RGB)*272
Viewing Direction	12:00 O'clock
LCD Controller/Driver	ST7282
Logic Voltage	3.3V
Operation Temperature	-20°C TO 70°C
Storage Temperature	-30°C TO 80°C
Backlight	White LED Backlight(7PCS-WHITE LED) Vf = 19.6V~22.4V, If =20mA Luminance = 250cd/m2(Typ)
Remark	

Backlight Circuit



REV	Revision content description	Date
01	FIRST ISSUE	2022.03.03

 <b>LCD WORLD LIMITED</b>		TOLERANCE(公差)		Mod.Name	
		TOLERANCE UNLESS OTHERWISE SPECIFIED X.X±0.3 X.XX±0.2		LW043DURN5-05	
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME	
mm				ASSEMBLE	